

www.sommerer.com



Floor-guided pit lift Lifting capacity 10 - 20 t


The floor-guided lift for the testing pit

- Electro-hydraulic drive
- Load lifted by means of operating keys, sensitive controls
- Special corrosion protection by way of piston rod and cylinder surrounded by oil
- Powerful 3 KW motor 400 V/16 A
- Lifting time 32 sec for complete lift of 800 mm
- Rollers with needle-roller bearings at lift and chassis
- Easy to handle by way of the ergonomic placement of the operating elements
- 6 m connection cable with euro plug CEE 16 A
- Robust finish with high structural stability
- Chassis freely movable on polyamide rollers, self-locking from 1.5 t or rail-guided in L or U-profiles at the pit floor



Type		Lift. Cap.	Stroke	Model
FKE	10, 14 FV	10, 14 t	800 mm	freely movable
FKE	16, 20 FV	16, 20 t	800 mm	freely movable
FKE	10, 14 Z	10, 14 t	800 mm	rail-guided
FKE	16, 20 Z	16, 20 t	800 mm	rail-guided

SOMMERER PIT LIFT

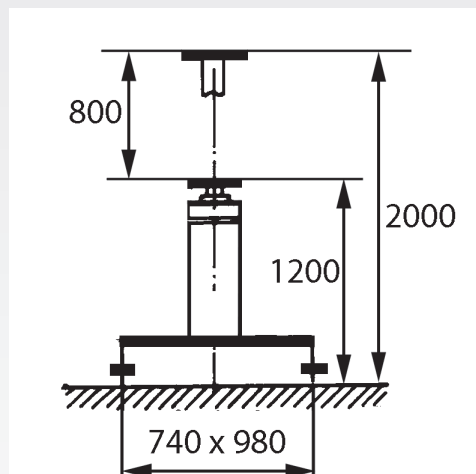

ERICH SOMMERER GMBH

Mönsheimer Straße 28
D-71292 Frießheim
Tel.+49 (0) 7044 9452-0
Fax+49 (0) 7044 9452-31
info@sommerer.com

DIN EN ISO 9001:2000

